




CONTACTLESS CONNECT

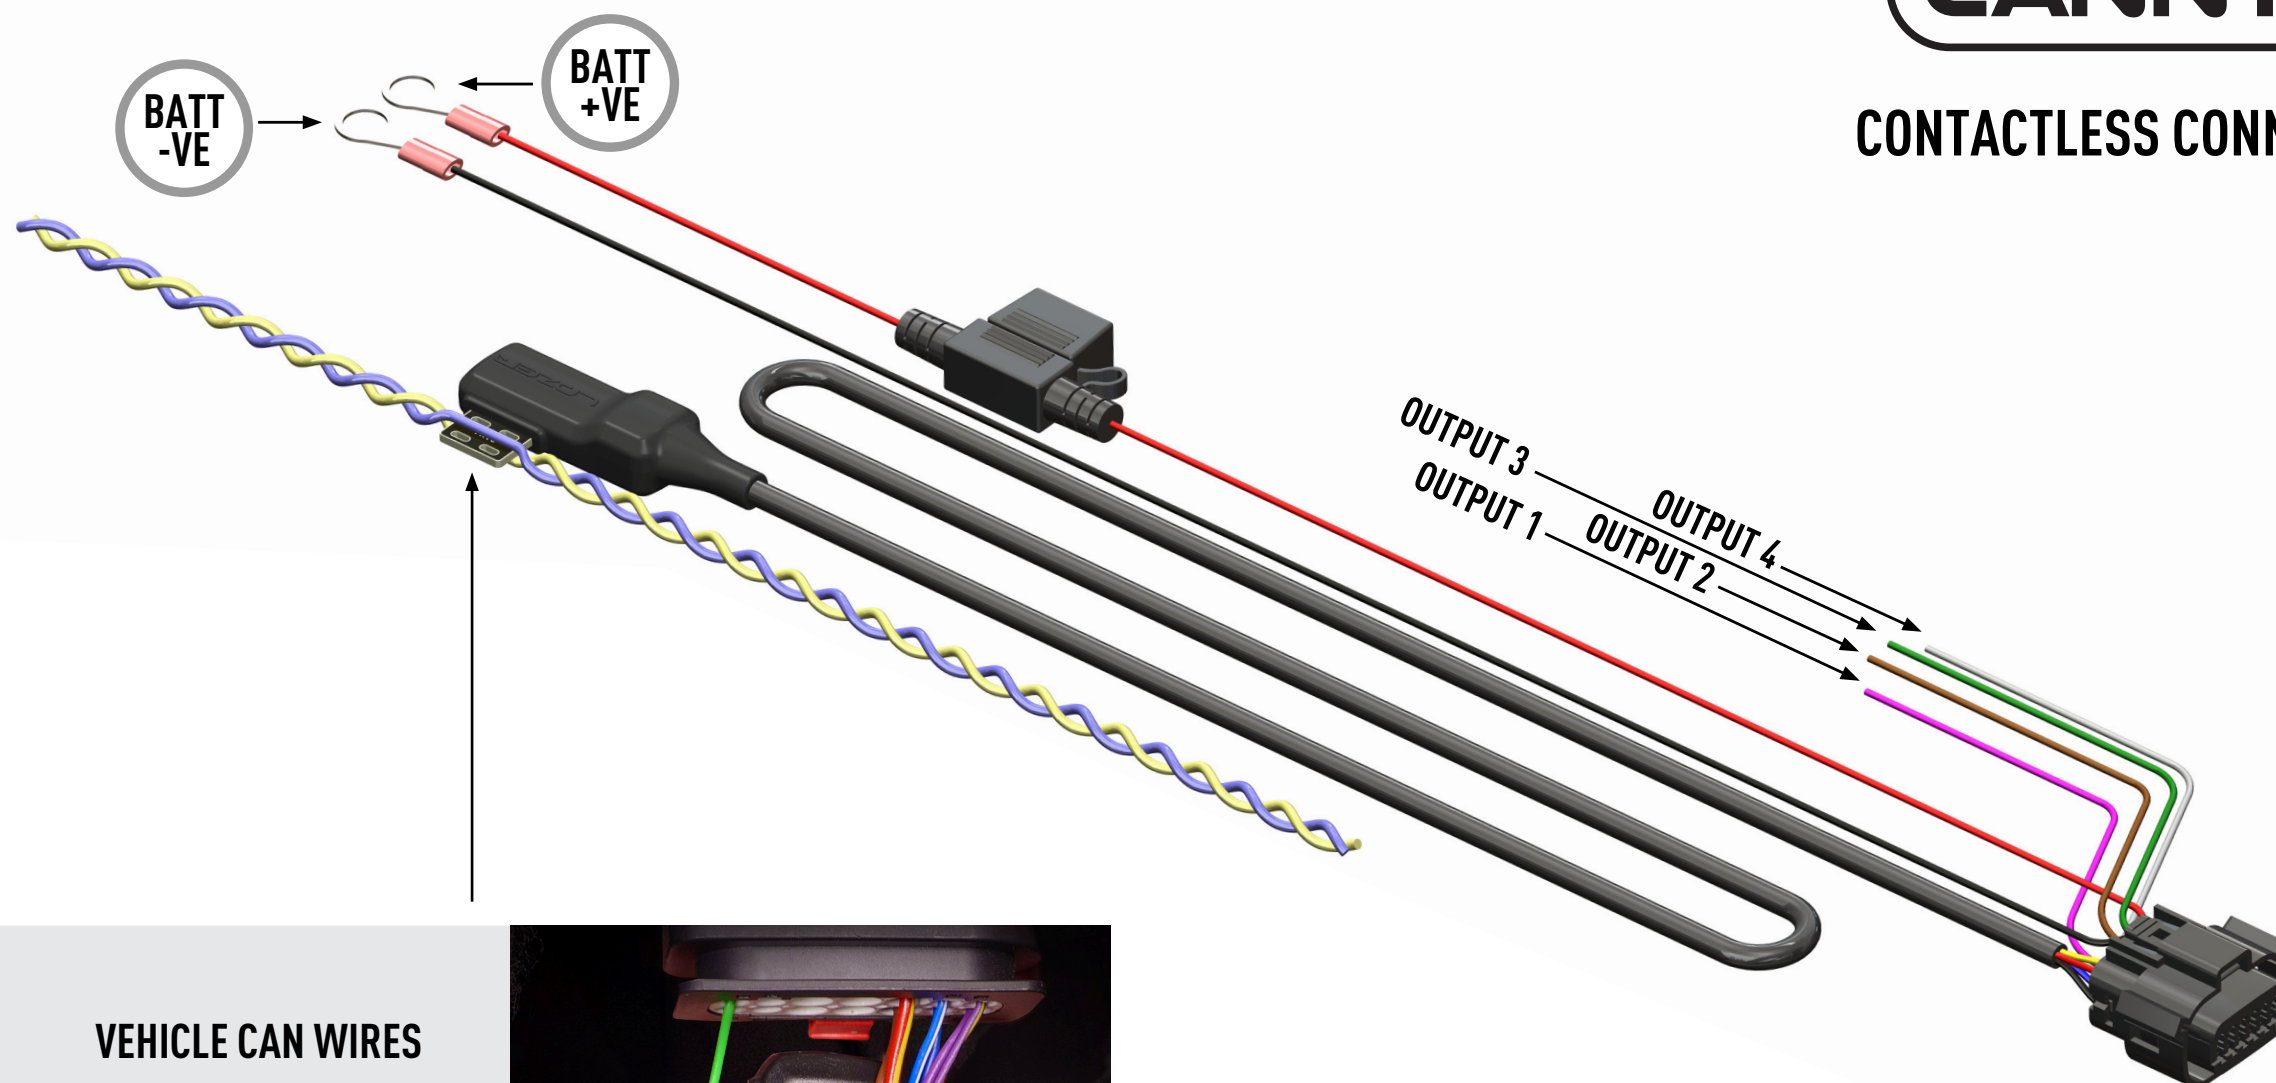

VEHICLE CAN WIRES

Place the vehicle's CAN wires in the center of the reader (marked with CAN H / CAN L) and secure them with cable ties.

The vehicle's CAN wire colours may vary depending on the make and model of your vehicle. To identify the correct wires, download the CANNY.LZR app and follow the vehicle-specific instructions.



CAN LO -> TOP



CAN HI -> BOTTOM

CANNY WIRE COLOURS		FUNCTION	DESCRIPTION
RED		+ VBAT	CONNECT TO A 12V OR 24V BUS SYSTEM
BLACK		- VBAT	CONNECT TO A CHASSIS GROUND POINT
PURPLE		OUTPUT 1	OUTPUT 12V/24V (1A MAX LOAD)
BROWN		OUTPUT 2	OUTPUT 12V/24V (1A MAX LOAD)
GREEN		OUTPUT 3	OUTPUT 12V/24V (1A MAX LOAD)
GREY		OUTPUT 4	OUTPUT 12V/24V (1A MAX LOAD)