

## LEDiving CANBUS CONTROL UNIT

### LEDiving CANBUS CONTROL UNIT



**Bypasses the vehicle's outage detection**

Prevents error messages in board computers during failure detection




**Removable installation by fixed clips**

Fasten terminals with fix wire tap connectors



**3 years OSRAM guarantee, refer to [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee) for precise conditions**

For more customer satisfaction

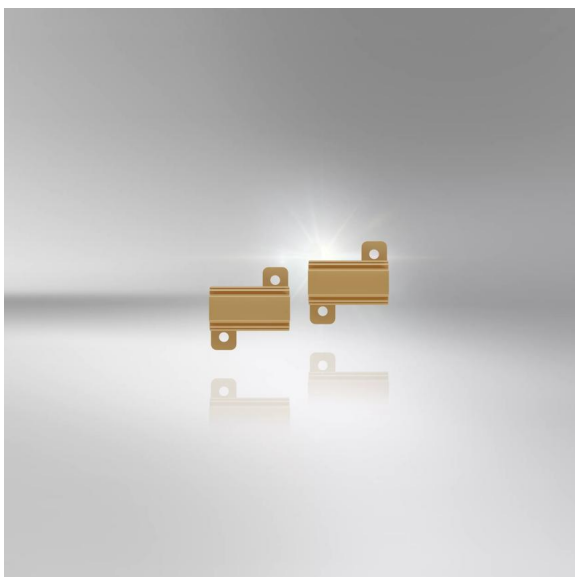

**Prevents failure messages**

The LEDiving CANBUS CONTROL UNIT serves as a bypass of a vehicle's lamp failure detection system when using a LED retrofit lamp. The control unit offers an easy installation and is suitable for most vehicle models with automatic lamp failure detection system. OSRAM provides a 3 year guarantee for this product.

# Product datasheet

## Technical data

### Product information

Application (Category and Product specific)	Accessories for LED retrofits
---	-------------------------------


### General Product Information

Global order reference	LEDCCU02
------------------------	----------

### Electrical Data

Power input	25 W
System wattage	21 W
Nominal wattage	21 W
Power input tolerance	±20 %

### Physical Attributes & Dimensions

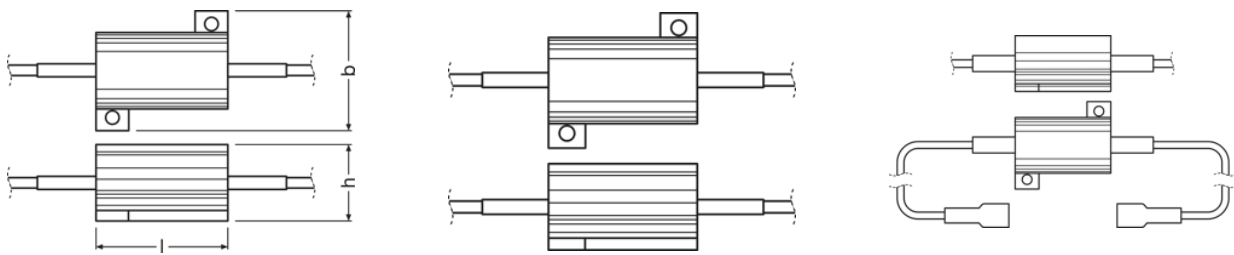

Diameter	16.0 mm
Product weight	23.00 g
Length	18 mm

### Lifetime Data

Lifespan B3	2000 hr
Lifespan Tc	2000 hr
Guarantee	3 years

### Capabilities

Technology	LED accessories <sup>1)</sup>
------------	-------------------------------

<sup>1)</sup> Accessories for light-emitting diode application

### Environmental & Regulatory Information

## Product datasheet

### Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Primary article identifier	4052899301993
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

### Equipment / Accessories



- Connector clips included

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899301993	LED CANBUS CONTROL UNIT CCU02	Folding carton box 2	95 mm x 30 mm x 135 mm	0.39 dm <sup>3</sup>	75.00 g
4052899302006	LED CANBUS CONTROL UNIT CCU02	Shipping carton box 20	198 mm x 160 mm x 146 mm	4.63 dm <sup>3</sup>	853.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction LEDiving CANBUS CONTROL UNIT
 User instruction GPRS_Safety symbols instructions

#### Safety advice

Application advice: For more detailed application information and graphics please see product datasheet and user manual.

#### References / Links

Guarantee terms are available at [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Product datasheet



EAC



# OSRAM